

SI-2000 Adapter Quick install




Direct connected ethernet cable



1 Connect AP Device, To "TO AP" port, via a ethernet line.



Or



2

Connect Antenna to the antenna port.



Direct connected ethernet cable



3 Connect Computer, To "AP CONF" port, via a ethernet line.




Cross connected Serial cable




4



Connect RS232 Port to Computer. Maybe a USB-RS232 Translator Device shall be used.

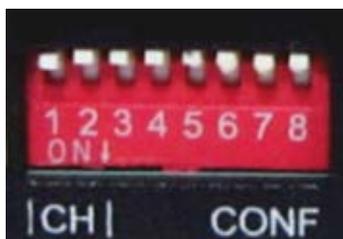

5 Confirm the Switch key is like this.

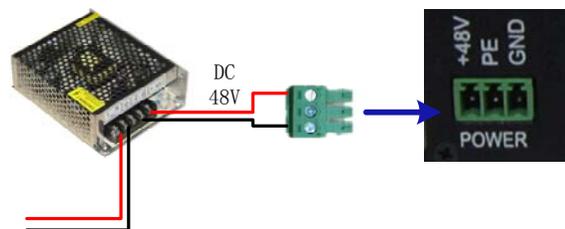

6 Connect Switch Power supply (DC48V) to power port.

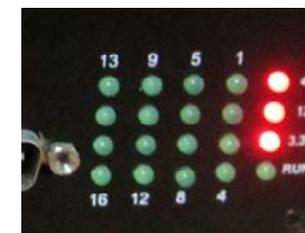

48V, 12V, 3.3V LED is lighting, Run LED is flashing.


7

Power on. The LED lamp should light.



SI-2000 Adapter Quick install



Step 1: Remove the 4 top screws, then remove the top cover.

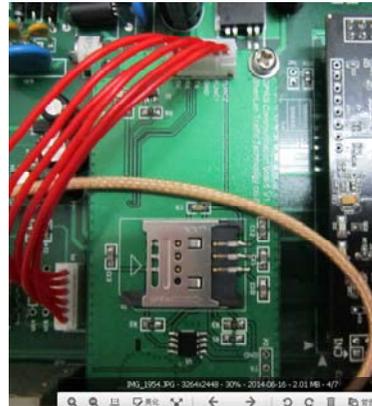

Then you can see the Wireless Telecom Communicate board, and the SIM card slot.

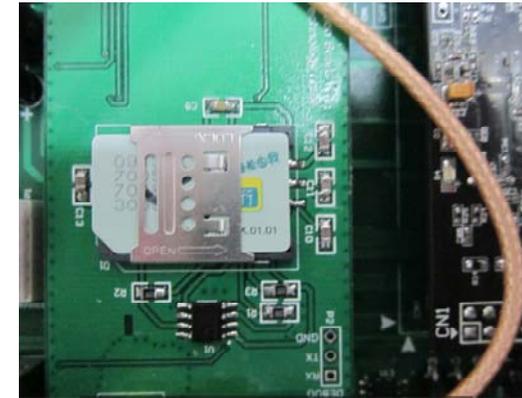

Step 2: Insert SIM card to slot.



Step 3: Install the 4 top screws of Box, Finish.